



CLUTCHTECH



TSB-FD03X

READ THIS BEFORE FITTING CLUTCH


Models applicable; Ford BA/BF XR8 5 and 6 speed

When fitting an Xtreme performance clutch to a BA/BF XR8 a 10mm spacer must be fitted behind the concentric slave cylinder.

This spacer is require to ensure the correct operating parameters are kept for the concentric slave cylinder.



On some models the fitment of this spacer may require a modification to the bellhousing to ensure clearance for the fluid supply line and bleeder line to function.

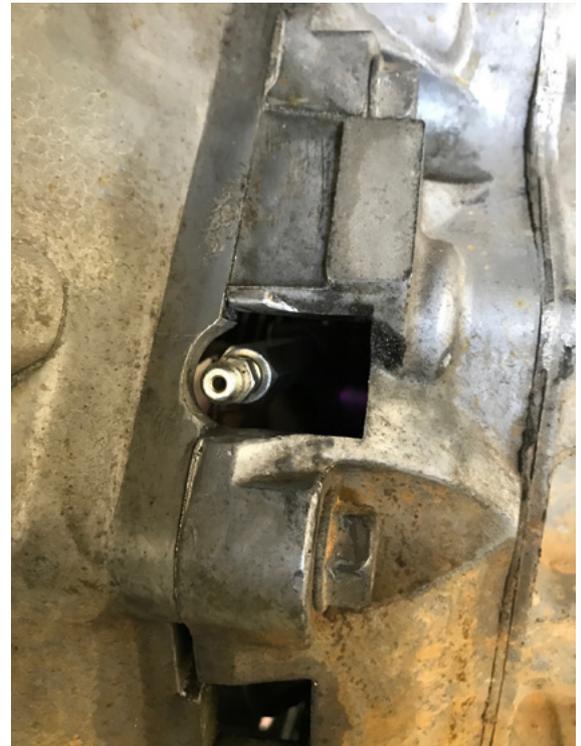

LEADING BRANDS

CLUTCHPRO CLUTCHPRO

COMMERCIAL



australianclutch.com.au

1800 CLUTCH (258824)

